



E-Bormio Deco

Technical sheet







PIPES: 13

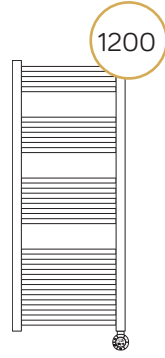


PIPES: 20

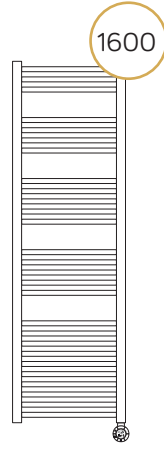

PIPES: 27

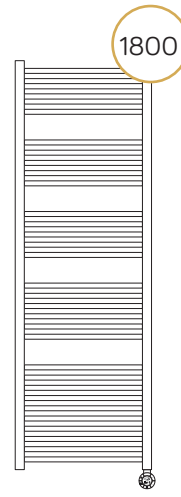


PIPES: 31




Description	Straight
Material	Carbon steel
Pipes - Ø	22x0,9
Collectors - mm	40x30x1,5 - «D» shape
Wall fixings	3
Max temperature	75 °C
Paint	Epoxy polyester powder
Packaging	Cardboard box and styrofoam protections
Protection rate	IP24
Electrical insulation	Class 2
Power source	230V - 50Hz
Heating element protection system	Overtemperature cut-out
Wire	Straight with shuko plug. Length approx. 1000 mm
Standard equipment	1 kit wall fixing brackets

Wall distance



Min.	Max
85	95

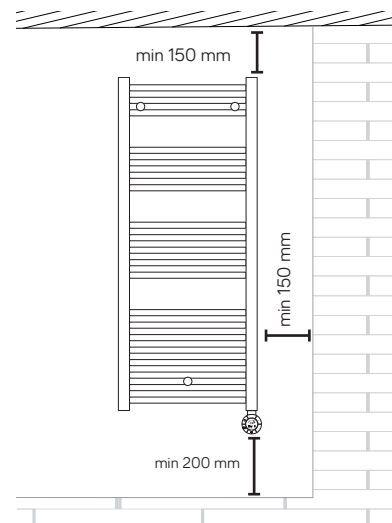

White RAL 9016 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C
392179	800	500	9,1	300	258	1024	90 °C
392180	1200	500	13,6	500	430	1706	105 °C
392181	1200	600	15,4	600	516	2047	105 °C
392182	1600	500	18,1	750	645	2559	100 °C
392183	1600	600	20,5	900	774	3071	105 °C
392184	1800	600	23,3	1000	860	3412	105 °C

Matt black RAL 9005 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C
392185	800	500	9,1	300	258	1024	90 °C
392186	1200	500	13,6	500	430	1706	105 °C
392187	1200	600	15,4	600	516	2047	105 °C
392188	1600	500	18,1	750	645	2559	100 °C
392189	1600	600	20,5	900	774	3071	105 °C
392725	1800	600	23,3	1000	860	3412	105 °C

Chrome - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C
392726	800	500	9,1	250	215	853	95 °C
392727	1200	500	13,6	400	344	1365	95 °C
392728	1200	600	15,4	500	430	1706	105 °C
392729	1600	500	18,1	500	430	1706	105 °C
392730	1600	600	20,5	600	516	2047	105 °C
392731	1800	600	23,3	750	645	2559	100 °C

MAIN FUNCTIONS OF THE THERMOSTAT

